

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number  
**WO 01/03370 A2**

- (51) International Patent Classification<sup>7</sup>: H04L 12/00 (US). MORRIS, Martin [US/US]; 1055 Crestview Road, Vista, CA 92083 (US). KUMAR, Rajiv [IN/US]; 12662 Senda Panachea, San Diego, CA 92129 (US). NGUYEN, Lyn [US/US]; 3114 Chollas Road, San Diego, CA 92105 (US).
- (21) International Application Number: PCT/US00/18598
- (22) International Filing Date: 6 July 2000 (06.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/347,374 6 July 1999 (06.07.1999) US  
09/347,385 6 July 1999 (06.07.1999) US  
09/347,894 6 July 1999 (06.07.1999) US
- (71) Applicant (for all designated States except US): WIDCOMM, INC. [US/US]; Suite 205, 9645 Scranton Road, San Diego, CA 92121 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PHAM, Hiep [CA/US]; 13467 Wyngate Point, San Diego, CA 92130
- (74) Agents: RICHARDSON, Bryan, D.; Cooley Godward LLP, 3000 El Camino Real, Five Palo Alto Square, Palo Alto, CA 94306-2155 et al. (US).
- (81) Designated States (national): DE, GB, KR, MX, SE, US.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- Published:**  
— Without international search report and to be republished upon receipt of that report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 01/03370 A2

(54) Title: UTILIZATION OF THE INTERNET PROTOCOL TO FACILITATE COMMUNICATION INVOLVING MOBILE DEVICES

(57) Abstract: A data communication system capable of forwarding IP-addressed data to devices as such devices move among networks having different IP addresses is disclosed herein. The system includes first and second networks containing first and second pluralities of nodes. At least one of the first plurality of nodes is adapted to receive data transmissions from an external IP-based network. Upon joining the first network, this device is assigned an IP address which remains with it irrespective of whether it moves beyond the range of the first network. When this device roams into the vicinity of the second network, data addressed to the device which is received at the first network is forwarded via at least one node of the second network to the roaming device.

5

# UTILIZATION OF THE INTERNET PROTOCOL TO FACILITATE COMMUNICATION INVOLVING MOBILE DEVICES

10

## FIELD OF THE INVENTION

The present invention relates generally to communication systems, and more particularly to a method and associated apparatus for allowing a device to continue communication via the Internet Protocol ("IP") even while moving among networks having different associated IP addresses.

15

## BACKGROUND OF THE INVENTION

Computer networks allow multiple computers, peripherals and other information storage, retrieval or processing devices to share data. Each device attached to a network is typically referred to as a node on the network, or a node that is part of the network. Local Area Networks ("LANs") have historically consisted of nodes interconnected by physical telecommunications media (e.g., coaxial cable, twisted pair wire, or fiber optics). Recently wireless LANs, the nodes of which are not connected by means of a physical medium, have started to appear in the market. These wireless LANs communicate by means of infra-red (IR), radio or other signals. One of the benefits of using wireless LANs is that cabling is not required. This is a particularly useful feature for mobile nodes such as laptop and notebook computers, PDAs (personal digital assistants), and the like. If equipped with an appropriate wireless adapter, the mobile nodes can move around within a predefined coverage area and remain connected to the network.

20

25

30

35

In order for the nodes of a particular network to be able to communicate with each other, some sort of common addressing scheme must be implemented. In a traditional wired network, one very common method of communicating between nodes is to utilize Internet Protocol ("IP") addressing. When a node initially joins a network operating with the Internet Protocol, it is assigned an IP address consisting of at least two portions: a network address and a destination address. IP addresses are typically fixed and remain with the node irrespective of whether the node relocates to another network. In a traditional wired network, the fixed nature of IP addresses is not problematic because nodes are stationary and consequently do not migrate to networks outside of their original home network. Recently, wireless

5 nodes have been added to traditionally hard-wired networks. Like all devices  
adhering to the Internet Protocol, mobile devices are accorded IP addresses having a  
network portion and a device portion. The network portion identifies the mobile  
device's "home network" while the device portion distinguishing the mobile device  
10 from other members of its home network. The routing of data packets through the  
Internet is generally exclusively based upon the network portion of the destination IP  
address. Specifically, Internet routers extract the destination network address from a  
given data packet and then forward that packet to the appropriate network. Once the  
packet reaches the appropriate network, the network server examines the device  
portion of the IP address and forwards the packet to the appropriate device.

15 When a mobile device is located in its home network, data packets addressed to  
a particular mobile device are simply sent to such device upon being received at the  
home network's access point. This process is transparent to the user so long as the  
mobile unit is located within range of its home network. However, when the mobile  
device travels outside of its home network data packets cannot easily be forwarded  
20 thereto and are often "dropped", which results in loss of data.

Several methods have been proposed to allow mobile devices to continue IP-  
based communication even when moving between networks having different IP  
addresses. One such technique requires that the mobile unit report changes in its  
address to the access point or network manager, in its home network. A router  
25 located in its home network stores each new IP address for the mobile unit and  
forwards any incoming packets to the mobile device's new IP address. An alternate  
approach involves establishing a pseudo presence, also called a "spoofed address," at  
the mobile's home network location. However, when mobile devices frequently  
move between networks having different IP addresses, these address-mapping and  
30 forwarding techniques can results in packets being forwarded to multiple locations,  
which may cause confusion and loss of data.

### SUMMARY OF THE INVENTION

Briefly, therefore, the present invention relates to a data communication system  
capable of forwarding IP-addressed data to devices as such devices move among  
35 networks having different IP addresses. The present invention includes first and  
second networks containing first and second pluralities of nodes. At least one of the  
first plurality of nodes is adapted to receive data transmissions from an external IP-

5 based network. Upon joining the first network, this device is assigned an IP address which remains with it irrespective of whether it moves beyond the range of the first network (i.e., the device's "home" network). When this device roams into the vicinity of the second network, data addressed to the device which is received at the first network is forwarded via at least one node of the second network to the roaming  
10 device.

In a preferred embodiment, each of the nodes in the first and second networks broadcast messages indicating the services that it offers and the nodes that are within its range. These broadcasts allow the mobile device to determine which devices it can use to create a connection between itself and the local access point in its home  
15 network. When the mobile device moves beyond its home network, it reestablishes a connection to its local access point using whatever combination of nodes it deems as being most efficient. Once this connection is made, the local access point is able to forward data to the mobile device.

In an alternate embodiment, an internetworking node participates in both the  
20 first and second networks, and receives a first set of network information relating to the first network from the first plurality of nodes. In an another embodiment, the mobile device is capable of anticipating when it is about to lose contact with one of the nodes that is providing a connection between it and its home local access point. When the mobile device makes this determination, it attempts to establish an  
25 alternative route for the connection to its local access point. If the mobile device is of a type requiring continuous connection to an external network, an additional embodiment allows the mobile device to simultaneously maintain more than one connection between itself and its local access point. This minimizes the risk that data packets addressed to the mobile device will be "dropped".

### 30 BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

FIG. 1 shows a data communication system comprising two wireless networks and a means for forwarding data between the networks.

FIG. 2 contains a data communication system consisting of two wireless  
35 networks and an internetworking node in accordance with a preferred embodiment of the present invention.

5           FIG. 3 is a block diagram illustratively representing the components of a wireless node and associated software configured in accordance with a preferred embodiment of the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

10           The present invention is more fully described with reference to FIGS. 1 - 3. An exemplary implementation of the invention is discussed and illustrated with reference to its implementation using wireless networks predicated on the proposed "Bluetooth" wireless communications protocol. This protocol contemplates the grouping of physically proximate wireless nodes, and is described in *Specification of the Bluetooth System*, v0.8, January 22, 1999 (and in subsequent revisions thereof).  
15           It should be understood that this invention is not limited to such a wireless protocol, and could be similarly implemented using other types of fixed or wireless networks. As is described hereinafter, the present invention discloses a method and apparatus for relaying data addressed to a mobile device nominally associated with a first network when such device becomes associated with other networks.

20           FIG. 1 illustrates a data communication system 10 consisting of a hard-wired network 12 and first and second wireless networks 20 and 22, each containing a network address location A1 and A2. The first and second wireless networks 20 and 22 each contain a plurality of wireless nodes. For purposes of clarity, only wireless nodes L1 and L3 are depicted in wireless networks 20 and 22. It should nonetheless  
25           be understood that the present invention is equally applicable to implementations in which first and second wireless networks include numerous wireless nodes. The system 10 also contains a relay node L2 connecting the two wireless networks, a first mobile device D1, and a hard-wired device D2 connected to the hard-wired network 12. In a typical configuration, D2 would actually be a network of devices rather than  
30           a single device. The device D2 may comprise either a network of devices or simply a single device. Since the actual number of devices represented by D2 is irrelevant for purposes of explanation of the present invention, device D2 will hereinafter be referred to as a single device.

35           For purposes of illustration, it is assumed that certain of the wireless nodes depicted in FIG. 1 are mobile relative to one another. In the network architecture of FIG. 1, each node within the first network 20 is within the wireless coverage area of network access node A1 and each node within the second network 22 is within the

5        wireless coverage area of network access node April \_\_\_, 2000. The network access nodes A1 and A2 serve as conduits to the external network 12 for the first and second wireless networks 20 and 22, respectively. The access nodes A1 and A2, as well as a relay node L2, are also disposed for wireless communication, with the nodes L1 and L3.

10        Because the nodes within the wireless networks 20 and 22 are not necessarily within transmission range of all the other wireless nodes within the same networks, each wireless node may not be able to monitor all of the traffic within its network. For example, wireless node L1 may be able to "listen" to wireless node L2 but may not be able to monitor transmissions from wireless node L3. In a preferred  
15        implementation each wireless node transmits an advertisement identifying its address and the services it offers. Each such advertisement also incorporates the address of all other wireless nodes from which advertisements are received by the node transmitting a given advertisement. Based on this information, the mobile device D1 can determine all nodes participating in the networks and the service offered by each.  
20        As used herein the term "services" encompasses, without limitation, the capability of a given node to relay message information to and from one or more outside networks. Accordingly, the advertisement issued by each wireless node may also identify the other networks within which the wireless node is capable of communication and the services offered by each.

25        Referring to FIG. 1, when D1 first seeks to join the first wireless network 20 it transmits a signal to the network access node A1 via wireless node L1 so that it can be assigned an IP address by the Internet Service Provider ("ISP") providing network access via node A1. Through this transmission, device D1 establishes the first wireless network 20 as its home network; that is, it designates the network address of  
30        the first wireless network 20 as its network address. Because device D1 is not hard-wired to node A1, it is necessary for device D1 to access node A1 via a wireless communication link. In the exemplary implementation of FIG. 1, device D1 determines that it can establish a connection to node A1 through node L1 by listening to the periodic advertisements issued by nodes A1 and L1. As was mentioned above,  
35        these broadcasts contain network connectivity information pertinent to of all of the devices within range of A1 and L1. For example, A1's broadcast would indicate that it is connected to the hard-wired network 12, and is capable of communication with

5 nodes L1 and L2. Similarly, node L1's broadcast would reveal that it is within range of, and capable of communication with, nodes A1, L2 and D1.

Data may be routed to node D1 in a conventional manner when node D1 is within its home network 20. In this situation data destined for node D1 is sent to the IP address of node A1 from the external network 12. On the basis of the advertisements broadcast by L1, node A1 determines that node L1 has established a  
10 connection to D1. Node A1 then sends the data received from the external network 12 to node D1 via node L1.

Routing data to D1 using IP addressing becomes problematic when D1 moves outside of its home network 20, since node D1's IP address does not automatically  
15 change to reflect its new location within a different network. As a consequence, all the data intended to be sent to node D1 will continue to be routed over the external network 12 to node A1. If node A1 does not have a separate connection to device D1 when data packets arrive, node A1 will either drop the data packets or queue them for retransmission on the assumption that D1 will establish a new connection with A1.

20 Referring to FIG. 1, when D1 relocates to a position within the wireless coverage area of network 22 it listens to the connectivity information broadcast by the nodes within its range (device D1 is shown in phantom in network 22). If device D1 becomes located sufficiently near node L3, it may listen to its connectivity advertisement and determine a path over which data may be routed from node A1.  
25 After making this determination, D1 requests a connection to node A1 via a node along the chosen path (e.g., node L3). In order to establish a connection between nodes D1 and A1, node L3 establishes a connection to node L2 which in establishes a connection to node A1. Once these connections have been made, node A1 will forward any data packets, addressed to D1 that it has received over the hard-wired  
30 network 12.

FIG. 2 depicts an alternate embodiment of the present invention in which a wireless node L2' exists as a member of both first and second wireless networks 20' and 22'. The node L2' facilitates internetworking between the networks 20' and 22' in the manner described in the aforementioned copending Patent Application entitled  
35 "Distributed Management of an Extended Network Containing Short-Range Wireless Links". The wireless node L2, or "internetworking node", understands the protocols



5 of both the first and second wireless networks 20' and 22' and is capable of transparently relaying data traffic therebetween.

Referring again to FIG. 2, once device D1' begins moving outside of its home network 20' it may anticipate the loss of its connection to the network access node A1'. This is because device D1' monitors the signal strength of the advertisements being transmitted from L1, and will take notice when this signal strength drops below a predefined threshold. Once device D1' determines that a dropped connection between itself and node L1' is imminent, it will "listen" to the advertisements being broadcast by other wireless nodes within its range to determine if it can establish a simultaneous connection to node A1'. In the exemplary implementation of FIG. 2, device D1' determines that it may establish communication with node A1' via node L2'. Accordingly, device D1' then drops its connection with L1' after establishing a connection with node L2'. In this way device D1' endeavors to minimize the risk of loss of data packets by briefly maintaining a simultaneous connection to two distinct wireless nodes. In applications where preventing any loss of data packets is very important, device D1 may maintain such a simultaneous, connection continuously or for substantially longer periods of time.

FIG. 3 is a block diagram illustratively representing the components of a wireless node 100 and associated software configured in accordance with a preferred embodiment of the present invention: Referring to FIG. 3, the wireless node 100 may be in the form of an electronic device (e.g., a laptop or desktop computer, handheld electronic organizer, or printer) containing a first wireless adapter card 104 and a first RF transceiver 106 disposed for communication in accordance with a first network communication standard. The wireless node 100 may also optionally include a second wireless adapter card 108 and a second RF transceiver 110 for communicating in accordance with a second network communication standard. The second wireless adapter card 108 and the second RF transceiver 110 may be included within the wireless node 100 when, for example, it is anticipated that the wireless node may participate in networks operative in accordance with different network standards. For example, internetworking node L2' would preferably be configured with different wireless transceivers and associated adapter cards to the extent the first network 20' and second network 22' were governed by differing network communication standards. The wireless node 100 may also include a LAN adapter

5 card 112 for facilitating communication with a wired LAN, or alternately a wireline modem for effecting communication through the PSTN.

Each wireless adapter card and transceiver is controlled by a CPU 114 operative to execute program instructions of the various software routines 122 stored in memory 126. Within wireless nodes, a network resources table 130 is updated in  
10 response to internet management broadcasts by transmitting nodes of the individual wireless networks. The network resources table 130 stores the network address and services offered by each wireless node. In the case of internetworking node L2', these advertised services may include the services provided by a wireless node from a neighboring network in communication with the internetworking node.

15 Include among the software routines 122 within internetworking nodes is a forwarding routine 138 for forwarding messages to the wired LAN via the LAN adapter card 112, or to another wireless node via one of the wireless transceivers 106, 110 and associated wireless adapter card 104, 108. An advertisement generating routine 140 operates to generate the advertisements issued by the wireless node 100  
20 which specify its network address and services offered.

Although the above application has been described primarily with reference to specific embodiments, one skilled in the art can readily appreciate that the teachings of the present invention may be applied in other communication contexts. For example, in certain embodiments the, first and second wireless networks described  
25 above could instead comprise networks of fixed devices linked by hard-wired local area networks ("LANs"). Assuming a wireless or other communication link could be established between a pair of devices within the different networks, data could be forwarded among such networks in accordance with the invention upon movement of a device from one network to the other. Thus the application is meant only to be  
30 limited by the scope of the appended claims.

5           What is claimed is:

1.   A data communication system comprising:
  - 10       a first network including a first plurality of nodes, said first network having a first network address;
  - a second network including a second plurality of nodes, said second network having a second network address; and
  - 15       means for forwarding, from said first network to said second network, message information received at said first network and addressed to a first node of said first plurality of nodes when said first node establishes communication with said second network.
2.   The data communication system of claim 1 wherein said means for forwarding
  - 20       includes an internetworking node included within said first plurality of nodes and within said second plurality of nodes.
3.   The data communication system of claim 2 wherein said internetworking node includes:
  - 25       means for receiving a first set of network information relating to said first network from said first plurality of nodes, said first set of network information identifying a first network access point associated with said first network wherein said message information is available from said first network access point; and
  - 30       means for transmitting, to one of said second plurality of nodes, said first set of network information and an identity of said internetworking node.
4.   The data communication system of claim 3 wherein said one of said second
  - 35       plurality of nodes includes means for broadcasting said first set of network information, said first node including means for receiving said first set of network information broadcast by said one of said second plurality of nodes upon establishing communication with said second network.

5

5. The data communication system of claim 1 wherein said means for forwarding includes means for transmitting said message information over a communication link between one of said first plurality and one of said second plurality of nodes.

6. A data communication system comprising:

10 a first network including a first plurality of nodes, said first network having a first

network address and a first network access point for receiving message information directed to said first network;

15 a second network including a second plurality of nodes, said second network having a second network address; and

an internetworking means for forwarding at least a portion of said message information from said first network access point to said second network when one of said first plurality of nodes establishes communication with said second network.

20

7. A data communication system comprising:

a first wireless network including a first plurality of wireless nodes, said first network having a first network address;

a second network including a second plurality of wireless nodes, said second network having a second network address; and

25

means for forwarding, from said first wireless network to said second wireless network, message information received at said first wireless network and addressed to a first node of said first plurality of wireless nodes when said first wireless node establishes

communication with said second wireless network.

30

8. The data communication system of claim 7 wherein said means for forwarding includes an internetworking node included within said first plurality of wireless nodes and within said second plurality of wireless nodes.

35

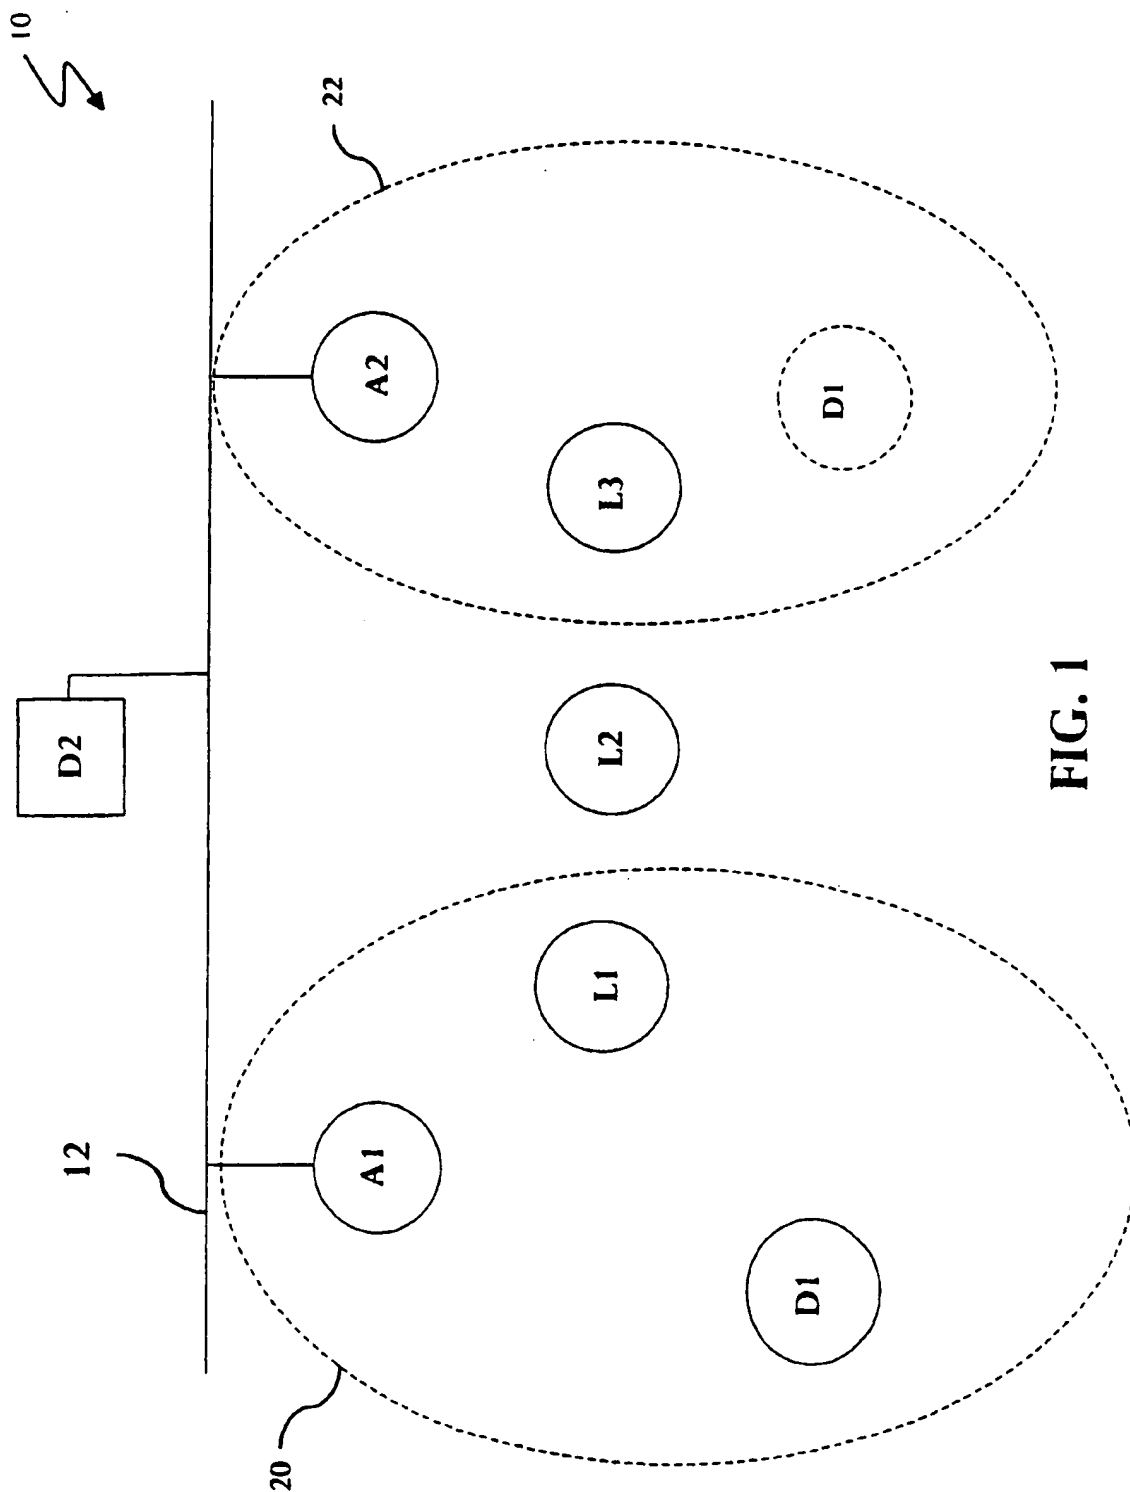
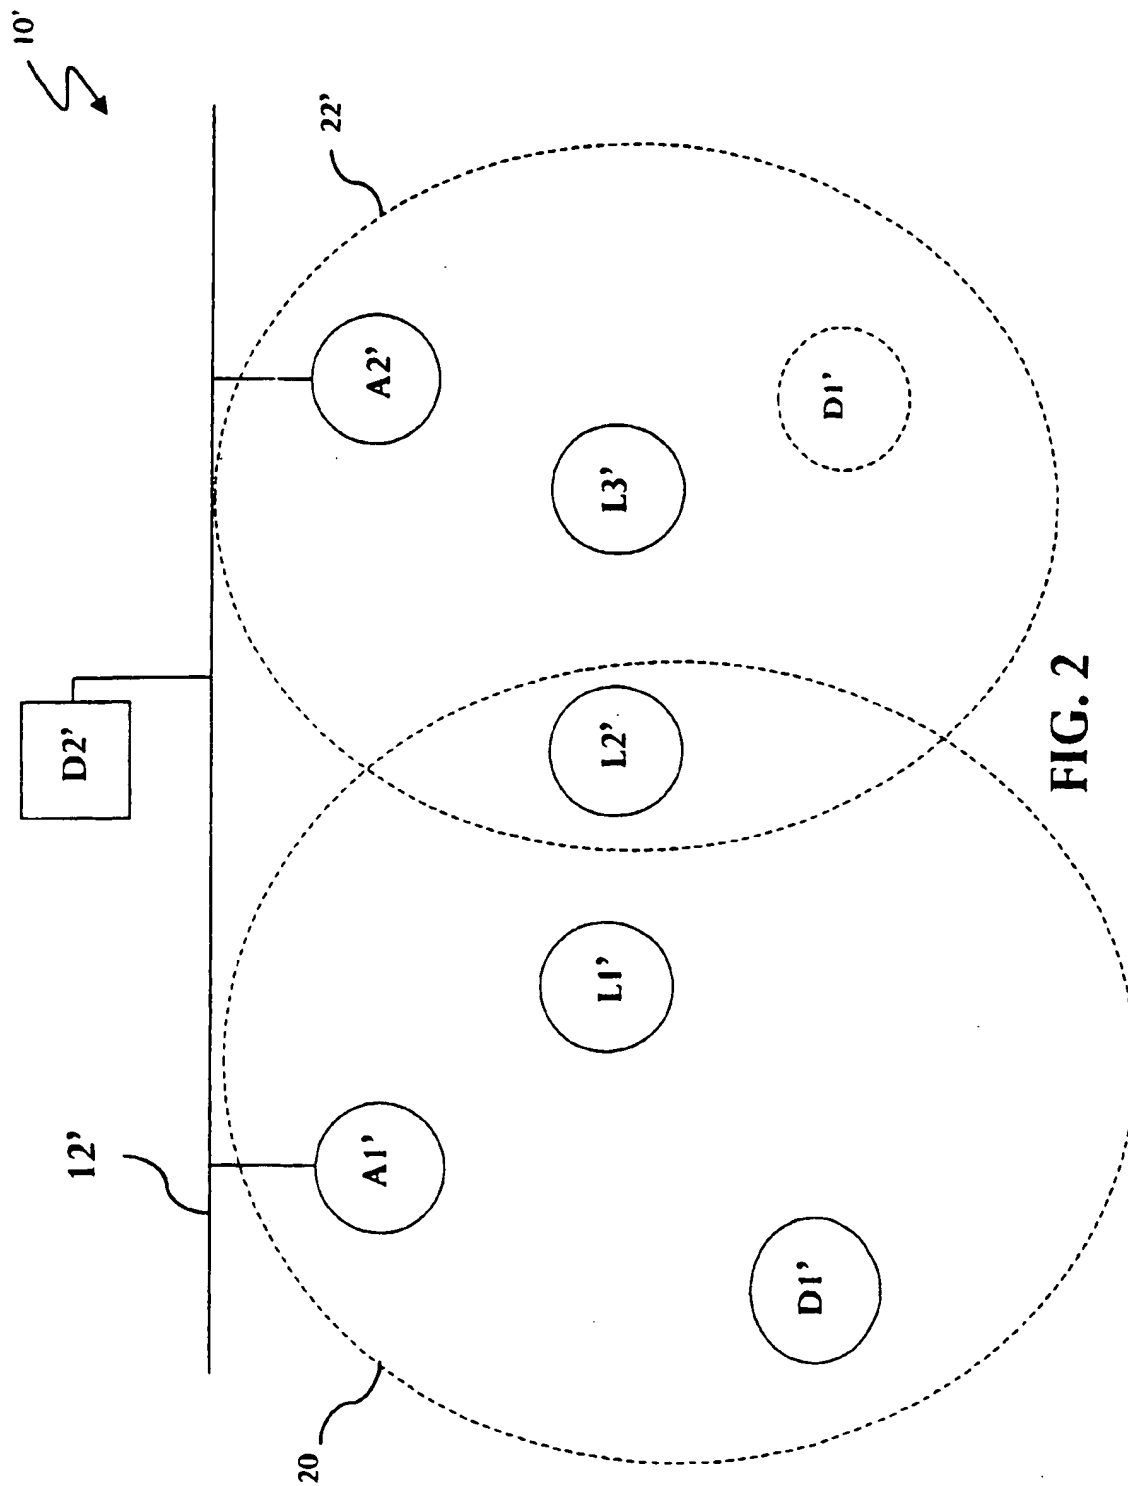


FIG. 1



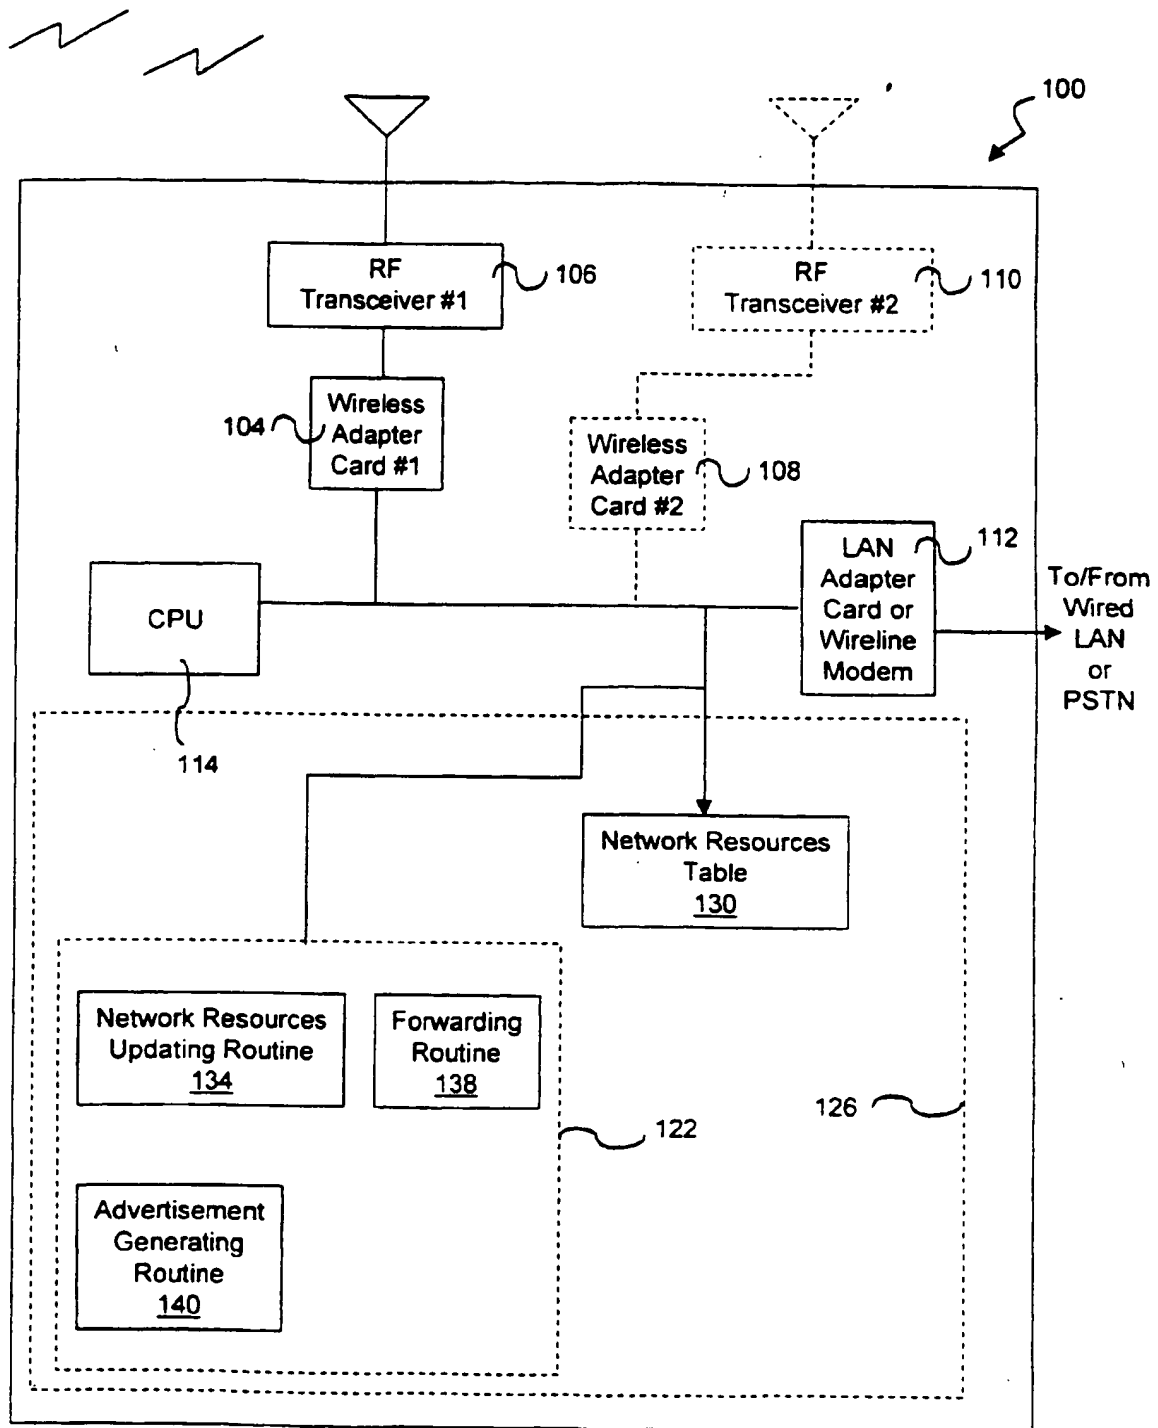


FIG. 3